



04-27-04

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT: FAWCETT, DARREN )  
)  
Application No.: 10/808,642 )  
)  
Filing Date: 03/25/04 )  
)  
For: APPARATUS AND METHOD FOR THE )  
AVOIDANCE OF RF INTERFERENCE )  
)  
Art Unit: UNKNOWN )

TRANSMITTAL OF PRIORITY DOCUMENT

Director for Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

Enclosed herewith is a certified copy of British Patent Application No. 0307325.1 for which the above-identified patent application claims priority from.


If, for any reason, this priority document is not acceptable, please inform the undersigned as soon as possible.

Respectfully Submitted

HEAD, JOHNSON & KACHIGIAN

Date: 04/26/04


Customer No. 24,118

  
Mark G. Kachigian, Reg. No. 32,840  
228 West 17th Place  
Tulsa, Oklahoma 74119  
(918) 587-2000  
Attorney for Applicant

"EXPRESS MAIL" Mailing Label No. EV382993595US

Date of Deposit: April 26, 2004

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington D.C. 20231 by







INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated 29 March 2004



Handwritten signature or scribble.

# Patents Form 1/77

Patents Act 1977  
(Rule 16)



# 1/77

31MAR03 E796388-4 000346  
P01/7700 0.00-0307325.1

THE PATENT OFFICE  
L  
29 MAR 2003  
NEWPORT

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference  
GW-G33469
2. Patent application number  
(The Patent Office will fill in this part)  
0307325.1 29 MAR 2003
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
Pace Micro Technology Plc  
Victoria Road  
Saltaire  
Shipley  
BD18 3LF  
Patents ADP number (if you know it)  
If the applicant is a corporate body, give the country/state of its incorporation  
England  
7588569 001
4. Title of the invention  
Apparatus and Method for the Avoidance of RF Interference
5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
Bailey Walsh & Co  
5 York Place  
Leeds  
LS1 2SD  
Patents ADP number (if you know it)  
224001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  

Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
  - a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
 See note (d))  
Yes

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s)

Abstract

Drawing(s) 1 + 1 DL

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

B. W. G.

Date

28.03.03

12. Name and daytime telephone number of person to contact in the United Kingdom

G Wood  
0113 243 3824

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Apparatus and Method for the Avoidance of RF Interference

The invention which is the subject of this application relates to the provision of apparatus designed to receive data signals from a remote location via radio frequency (RF) transmissions.

In particular, the invention is provided to avoid the possibility of interference being experienced by said apparatus from other unwanted, radio frequency signals i.e. those signals which do not carry the required data signals but do interfere with the operation of the apparatus in receiving the wanted RF data signals.

Conventionally, apparatus to receive radio frequency signals, such as, for example, broadcast data receivers receive, from satellite transmissions, data signals transmitted at a range of frequencies from which data can be processed by the broadcast data receiver to generate video and/or audio. Said apparatus has conveniently been housed within a metal casing, typically cuboid in shape. In addition to preventing physical damage to the components of the apparatus, the metal casing also acts as a shield to prevent radio frequency signals which may be weaker but which can still be received by the apparatus, from actually being picked up by the apparatus and therefore prevent the same from interfering with the normal operation and processing of the wanted radio frequency signals.

There has, more recently, been increasing pressure to improve the aesthetic appeal of apparatus of this type and, as a result, it is found that apparatus increasingly is being housed within moulded plastic housings rather than metal housings. While this can improve the possibilities for aesthetic design of the apparatus, it does reduce the level of shielding from unwanted radio frequency signals. The reception of unwanted radio

frequency signals can cause the breakdown in processing the data from wanted radio frequency signals and in turn, cause a reduction in the performance of the apparatus to the user such as, for example, the video and/or audio which is reproduced can include errors therein causing break up of the video picture and/or audio and therefore be to the detriment of the user.

The aim of the present invention is to provide a method of avoiding or minimising the effect of unwanted radio frequency signals and to do so to an extent which allows either metal or plastic housings to be used without unduly effecting the performance of the apparatus in question in processing data from a remote location.

In a first aspect of the invention there is provided apparatus for the reception of data, said data transmitted to the apparatus at a range of radio frequency signals within a known frequency band or bands, said radio frequency signals selectable by the apparatus in response to a user selecting, said apparatus including a tuner to tune to the selected signal and wherein the bit error rate output is monitored and, if the said bit error rate exceeds, during operation, a predefined limit, the apparatus introduces an offset to the required frequency and tunes to the wanted frequency plus or minus said offset.

Typically, upon retuning to the frequency including the offset, the bit error rate is continued to be monitored so as to ensure that the same returns to a level below the predefined value.

In one embodiment, the predefined value for the bit error rate is  $2e-04$ .

In one embodiment tuning apparatus is used to tune to radio frequencies within the standard DVB IF band for satellite tuners



and the possible interference signals can be generated via GSM or DECT systems but may also include WLAN devices and any other devices which operate at relatively close frequencies.

In one embodiment, the apparatus includes at least one LNB and, in one embodiment, the LNB upon receiving a signal to be tuned, is moved from a low band frequency range to a high band frequency range or vice versa. In a further embodiment, if the LNB is a multiband or programmable LNB then, upon the bit error rate exceeding a predefined level, the LNB is either pre-programmed to a wanted channel frequency plus or minus the fixed offset value or alternatively, another LNB band is used whilst maintaining the requirement of using an IF between 950MHz to 2150MHz and in each case, the tuner is tuned to the new frequency. In this embodiment, once the retuning has occurred, a check can be made to ensure that the intermediate frequency band is between 950MHz and 2,150MHz.

In a further embodiment, the offset value is initially set at a minimum value and added or subtracted from the original frequency and the apparatus re-tuned to the new frequency. If the bit error rate then drops to below the predefined level, no further action is required. However, if the bit error rate still exceeds the predefined level then successive increases in the offset value are made, the apparatus re-tuned and the bit error rate re-checked at each step increase until the bit error rate value falls below the predefined level.

Specific embodiments of the invention will now be described with reference to the accompanying drawings, wherein:-

Figure 1 illustrates in schematic fashion an embodiment of apparatus with which the invention can be utilised.

Figure 1 illustrates apparatus for the reception of satellite data transmissions. The apparatus comprises a broadcast data receiver 2 which is connected typically via cables or a wireless network to a display screen 4 and speakers 6. Data which is received by the broadcast data receiver 2, is processed in the same and typically, from that data, video is generated for display on the screen 4 and audio is processed through speakers 6.

The data received by a broadcast data receiver is transmitted via a satellite system on a number of radio frequencies, said radio frequencies each carrying data for a particular television channel or channels or auxiliary services. Each of the radio frequency signals lie within a given band such as, for example, 950 – 2,150 MHz. The required frequencies on which the data for processing by the broadcast data receiver 2 are known and therefore, as a result, the user can interact with the broadcast data receiver to, for example, select a particular channel which they wish to view and/or listen to. Upon that selection being made, the broadcast data receiver 2, which includes at least one tuner therein, tunes to the particular radio frequency signal and a low noise block 8, provided as part of the satellite antenna 10 external of the premises but connected to the broadcast data receiver is set to a particular operating condition to receive that radio frequency signal to which the tuner has been set. The data carried on that particular signal is thereafter transferred to the broadcast data receiver from the satellite antenna and processed to generate the appropriate channel.

This system is well known and generally operates efficiently. A problem which is experienced however is that certain other apparatus which is operated within the vicinity of the broadcast data receiver may cause interference in that the said other apparatus such as, for example, DECT phones or mobile phones operating using a GSM network, use frequencies which are

within the frequency range of the broadcast data receiver and therefore when, for example, a telephone call is made via a mobile phone or DECT system, the radio frequency used for that and the data carried on that particular frequency, can be sufficiently close to radio frequency signals used for a particular channel at the broadcast data receiver to allow interference to occur. The risk of this interference is increased by the use of plastic housings 12.

In accordance with a first embodiment of the invention, when a particular radio frequency is selected following a user selection, and the broadcast data receiver is connected to a conventional LNB which can be moved between low and high band operation, then if the broadcast data receiver is used in the vicinity of, for example, a GSM or mobile phone, the following can occur in accordance with the invention.

GSM typically covers the frequency band 890-960MHz and 1710MHz-1876.5MHz, which falls near the top of the DVB satellite IF band. During a call to/from a GSM handset the radiated power from a GSM phone can range from 20mW to 2W, which is sufficient to couple into the tuner of the receiver through the feed cable and cause sufficient interference to degrade the wanted signal beyond correction. By monitoring the BER output from the demodulator, if a call is initiated to a nearby handset and the BER from the satellite tuner exceeds the QEF free limit of  $2e-04$ ; then the receiver ignores the standard tuning mechanism taken from the PID data and forces the LNB into high band/low band and tunes to the wanted channel +/- the additional offset. The monitoring method can be:-

1. Tune to channel
2. Monitor BER
3. If less than  $2e-04$  stay tuned, repeat step 2
4. Else ( $BER > 2e-04$ , because of an interferer)

5. Switch LNB to alternative band
6. Tune to new frequency
7. Monitor BER

If the broadcast data receiver is connected to programmable or multiband LNB then the same monitoring principles are used but the following describes the same in more detail.

The monitoring system cites LNB described with two Local Oscillators (LO) frequencies, 9.75GHz and 10.6GHz. This allows for a certain amount of interference avoidance but relies upon the LNB being operated outside of the specified band for IF. To overcome this problem a programmable LNB can be used. This has either tuneable LO's that could be shifted in frequency or 3 or more fixed LO's that could be used to tune to the wanted signal whilst keeping the IF in band, i.e. in between 950-2150MHz. In this situation the wanted channel would be tuned to and the BER from the demodulator monitored. If the BER exceeds  $2e-04$  the LNB would either be pre-programmed to a wanted channel +/- a fixed offset or another LNB band would be used whilst maintaining the requirement of using an IF of 950MHz - 2150MHz. The tuner would then be tuned to the new IF. This would be checked to see if it remains within the band 950MHz - 2150MHz, if so, the BER is monitored to ensure it is below  $2e-04$  or less than the previous BER. An algorithm similar to above is used.

1. Tune to channel
2. Monitor BER
3. If less than  $2e-04$  stay tuned, repeat step 2
4. Else ( $BER > 2e-04$ , because of an interferer)
5. Switch LNB to alternative band/Re-program LNB by - fixed offset
6. Is  $IF > 950MHz < 2150MHz$

7. If so tune to new frequency
8. Monitor BER
9. Is BER less than  $2e-04$
10. Repeat 8, else
11. Switch LNB to 3<sup>rd</sup> band/Re-program LNB by 2\*- fixed offset
12. Is  $IF > 950MHz < 2150MHz$
13. If so tune to new frequency
14. Monitor BER

For either fixed LNB's or re-programmable LNB's there would be sufficient overlap to cover the whole IF range of 950MHz-2150MHz

Where re-programmable LNB's are used the offset would start at a nominal frequency greater than the channel bandwidth, and then increase in steps either side of the wanted channel until the received signal was determined of sufficiently good quality.

Thus, in accordance with the invention, the user of the broadcast data receiver who would normally be faced with a poor signal during periods of interference, in which typically picture degradation would occur, can be provided with an improved service. Thus, in a practical embodiment, and using conventional LNB's, 11508MHz Horizontal tp D3S 27.5Msps CR/23. This currently uses low band, which puts the channel at 1758MHz, which is a handset frequency for Orange and T-Mobile. By using high band the channel is shifted to 908MHz, therefore avoiding interference from Orange and T-mobile GSM system.

Alternatively, using three bands within an LNB would mean that the third LNB is provided at 10.175GHz and the previous example signal shifted to 1333MHz which is moved away from

the GSM DECT and WLAN products, therefore avoiding known interference.

Yet further, if a programmable LNB is used then if programmed with a fixed offset value of 50MHz, the new frequency would be 1708MHz which is just outside the GSM band. Using the method of the invention, the bit error rate may still be relatively poor, i.e. above the predefined level so that the LNB may be shifted by  $2 \times 50\text{MHz}$  moving the intermediate frequency to 1658MHz which is further away from all known potential interference apparatus and at this stage the bit error rate will be reduced below the predefined level.

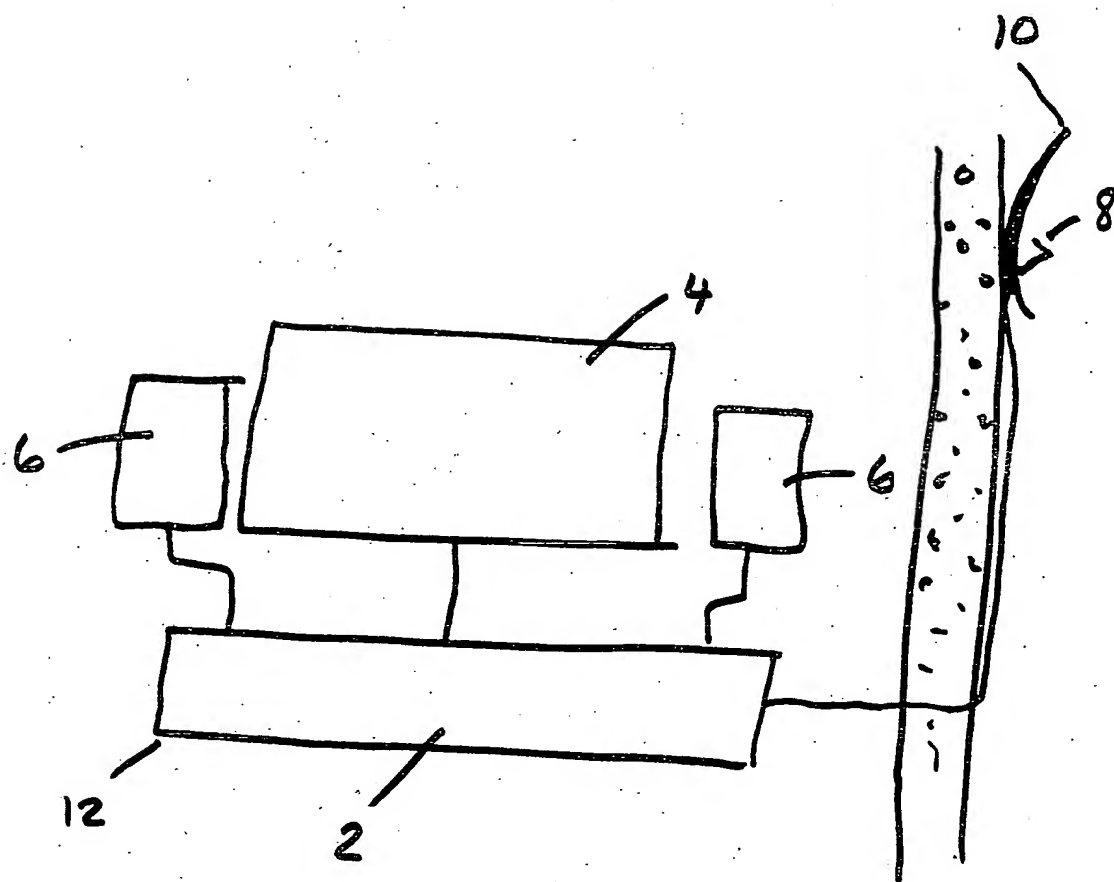


Figure 1

